




E+I ENGINEERING GROUP

INTELLIGENT MEDIUM POWERBAR

iMPB

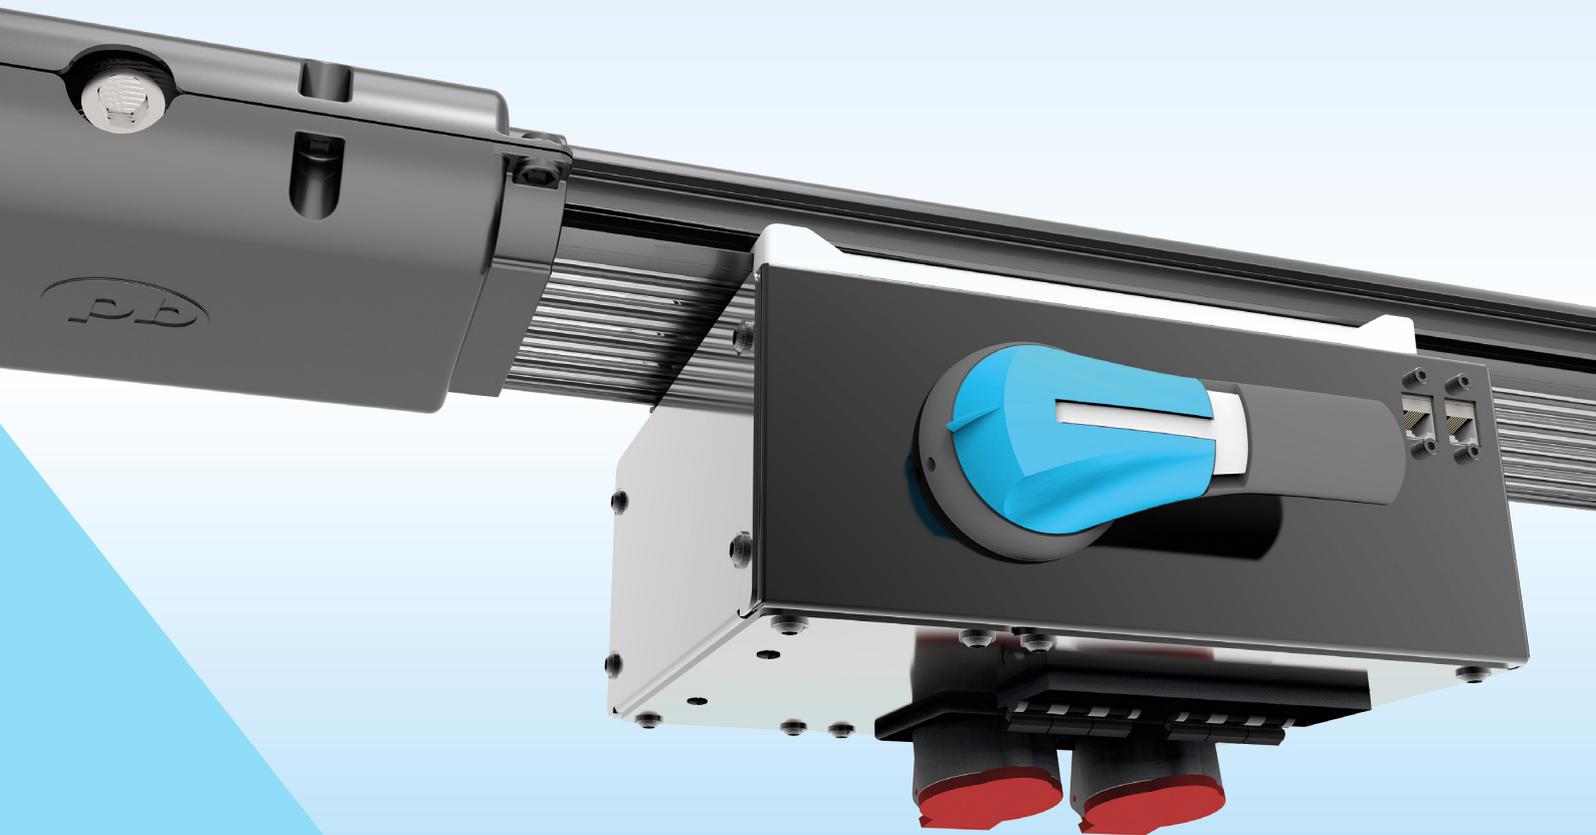

PowerBar

INTELLIGENT MEDIUM POWERBAR

iMPB

E+I Engineering's Intelligent Medium Powerbar (iMPB) is a 400 Volt encased track busway available with copper or aluminium conductors. The range is available in two bar configurations from 160A to 1000A. The bar is housed in an aluminium casing rated IP2X.

Key features:

- Unique open channel system allows tap offs to be placed anywhere along the bar
- Solid joint pack construction
- Up to 4m lengths
- Tap offs have mechanical/ electrical interlocks and secure to the bar with an 'earth first, break last' safety feature.

TECHNICAL FEATURES

iMPB is constructed from either high density 99.99% conductivity copper or high density 55% conductivity aluminium. The conductors are insulated with a custom IEC certified thermoplastic material with outstanding heat characteristics. The insulation has excellent dielectric strength and is impact resistant.

iMPB is constructed with an aluminium housing providing a durable structure which also acts as a ground path.

The iMPB range can be engineered with an over-rated neutral option for busbar systems with non-linear loads. The additional neutral capacity prevents overloading caused by zero sequence harmonic currents.

E-I Engineering offer a 100% fully isolated ground for systems where earth isolation is required e.g. systems with heavy microprocessors, based loads or large computer based installations.

Busbar Rating (Amps)	Housing Size (inches)	
	4 Pole	5 Pole
160A	175 x 44mm	210 x 44mm
250A	175 x 44mm	210 x 44mm
400A	175 x 44mm	210 x 44mm
630A	180 x 52mm	215 x 52mm
800A	180 x 52mm	215 x 52mm
1000A	180 x 52mm	N/A

Phase Configurations

Configuration	Phases	Neutral	Earth
TP/N	100%	100%	Case
TP/ON	100%	170%	Case
TP/NE	100%	100%	100%
TP/ONE	100%	170%	100%

LENGTHS AND JOINTS



Distribution Lengths

Distribution lengths

Distribution lengths are designed as an open track system; tap off units can be plugged in anywhere along the length of the busbar. The opening is finger safe meeting a rating of IP2X.

Straight lengths can be supplied at any length from 600mm - 4000mm.

The iMPB joint pack securely locks two feeder lengths together with a traditional busbar bolted joint. No special tooling is required and joints may be disassembled and reassembled easily.


iMPB uses custom designed thermally and electrically secure joint packs. Temperature monitoring of joints is available as an option.




Busway Joints

End Feeds

E+I Engineering can provide standard cable end boxes with options for cable entry from various points. Centre feeds and load bank feeds can also be supplied to meet specific project requirements.

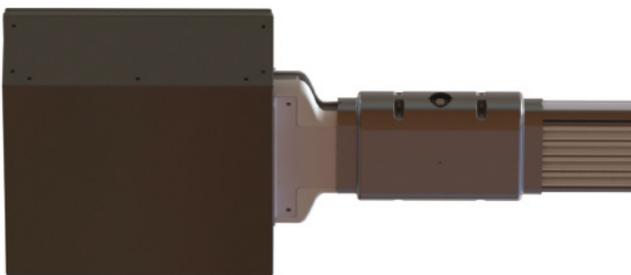

Cable End Feed

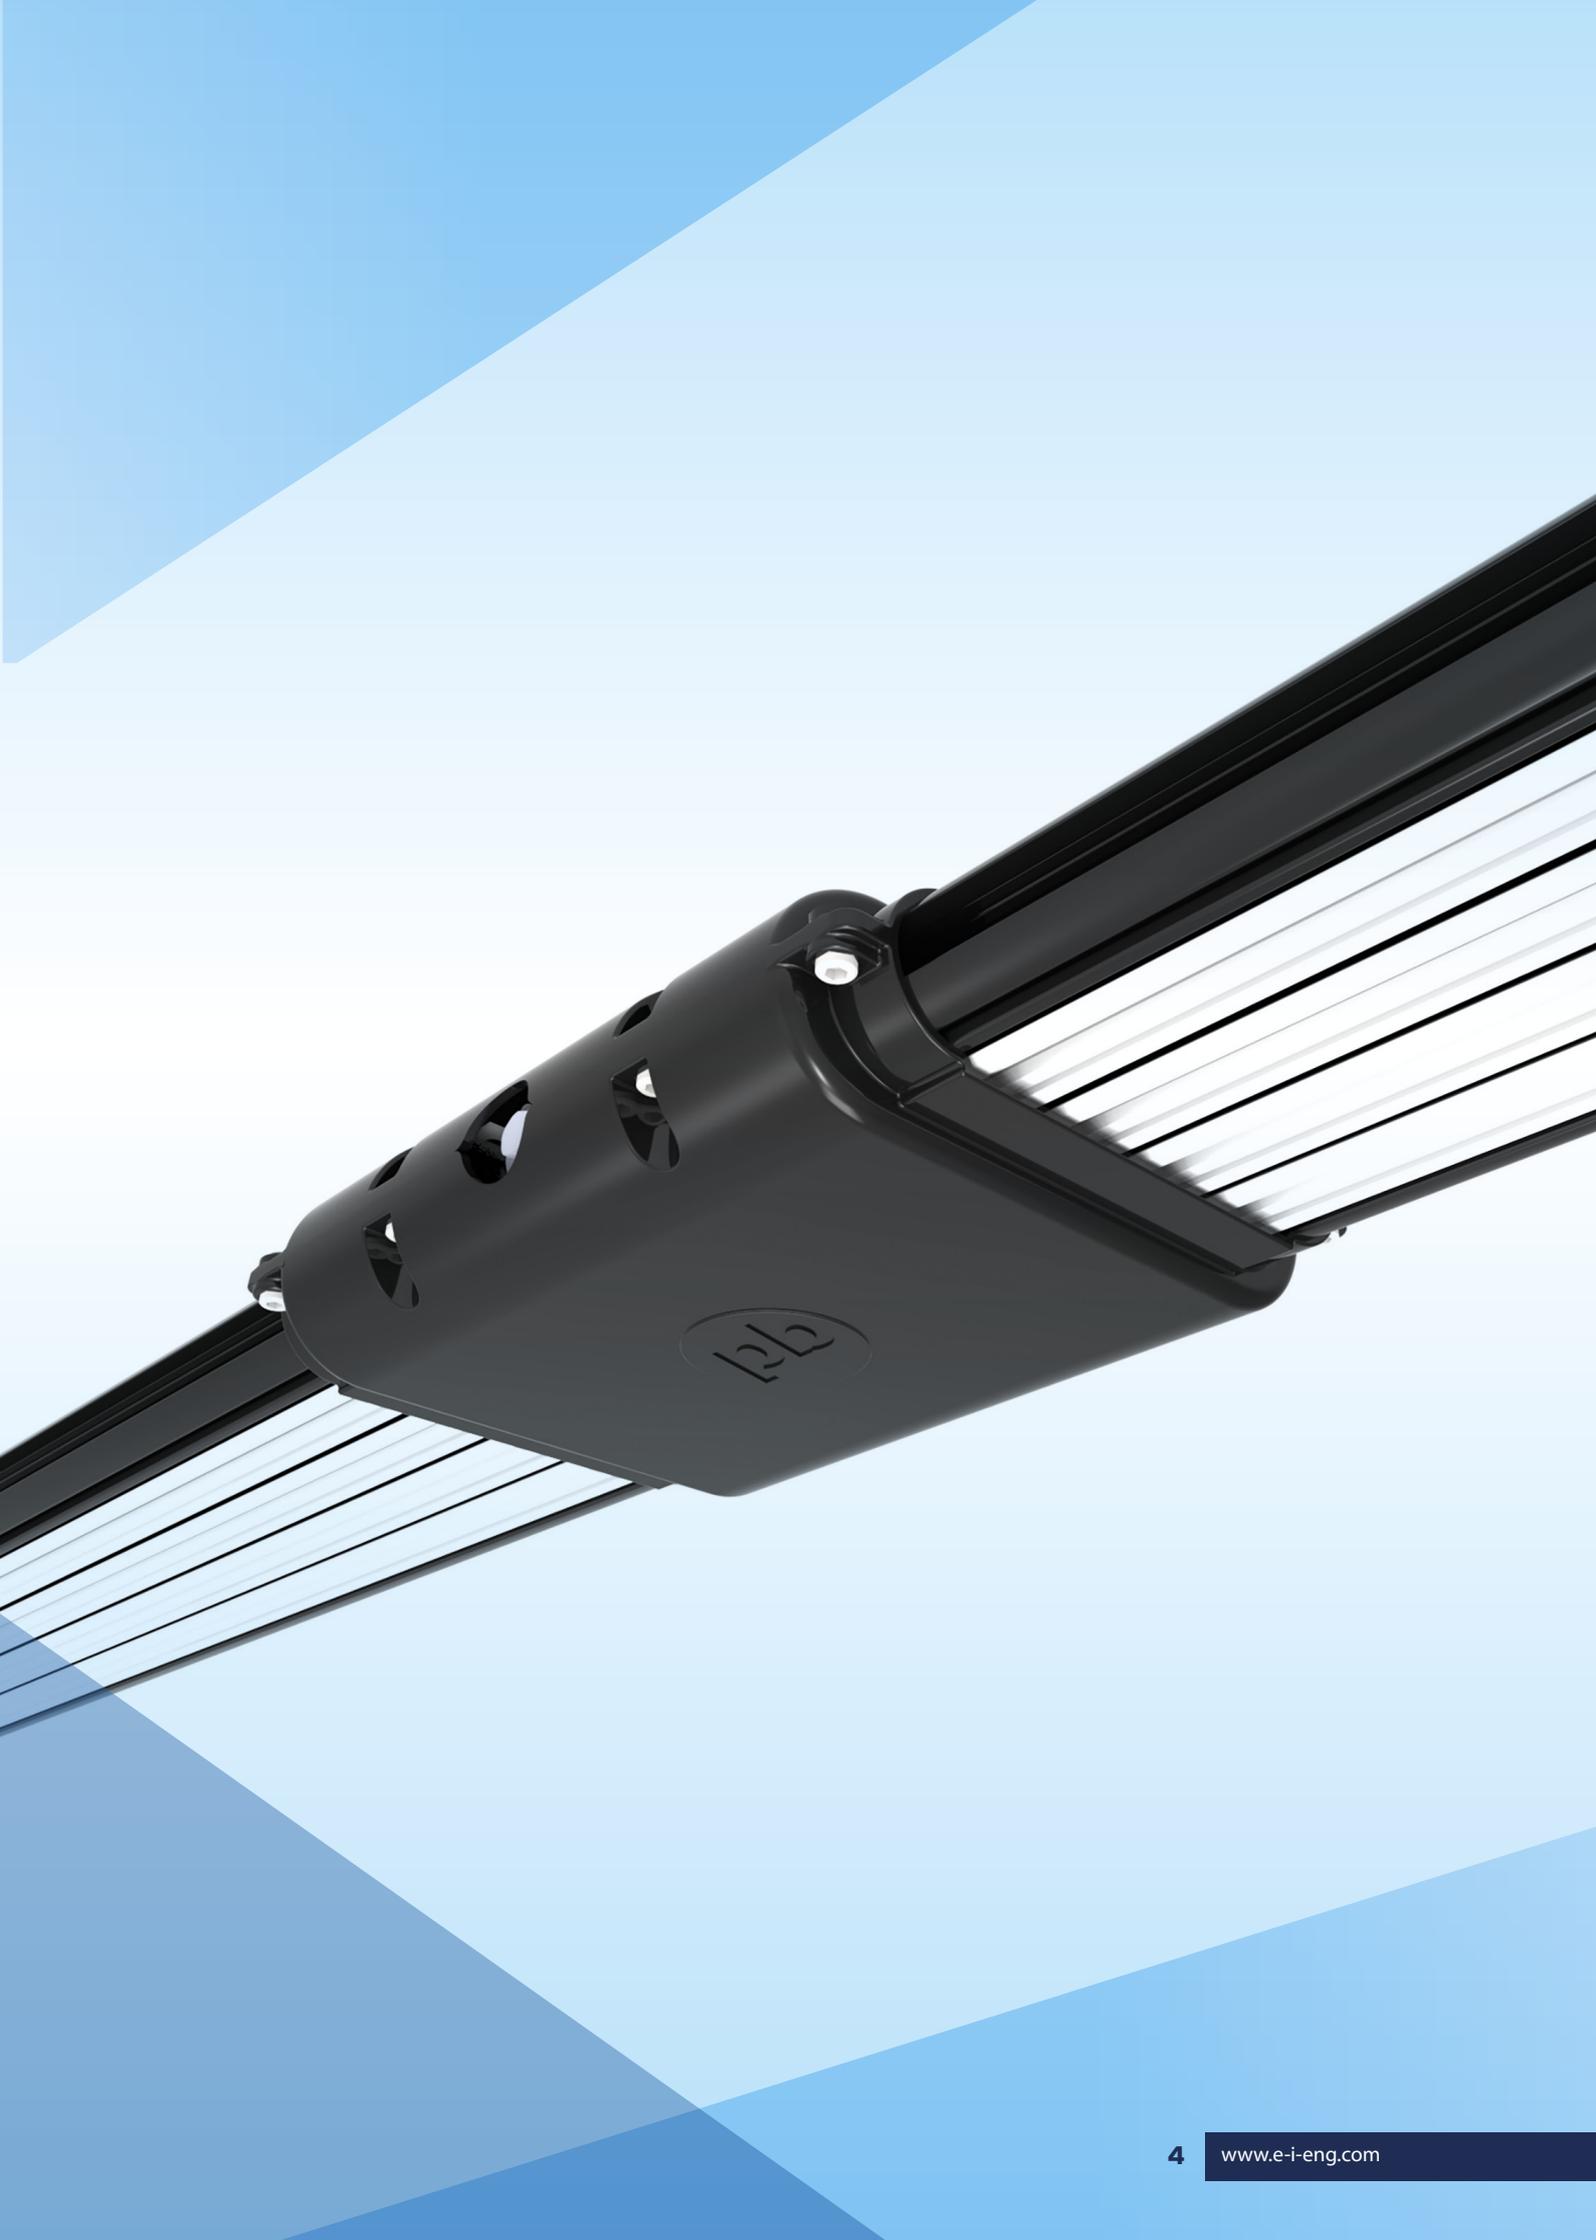


INSTALLATION



Typical Underfloor Arrangement



'Hot Aisle Cold Aisle' Arrangement

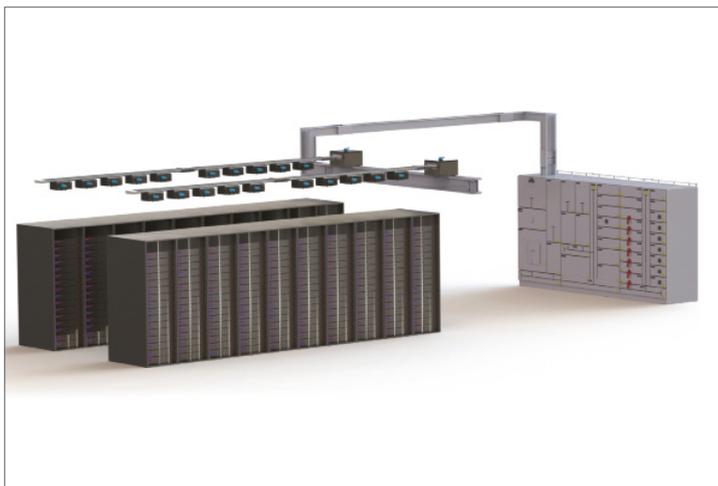

HPB to iMPB Connection

The modular design of iMPB allows it to be easily installed horizontally or vertically depending on specific project requirements.

Hanger brackets are supplied per length. These can be easily attached to drop rods for a seamless installation process.

iMPB can be connected directly to E+I Engineering's High Powerbar (HPB) to provide a full power solution.

TAP OFF UNITS

iMPB tap off units are engineered with the safety of the installer and user as the key criteria.

All tap off units have an 'earth first, break last' safety feature and can be safely installed using Powerbar's SafeWork Technology.

1. The units interlock onto the busway with a ground strip. This ensures that the ground is the first point of contact with the busbar system during installation.
2. The mechanical interlock secures the unit to the bar using high tensile strength lockable hardware which cannot be fitted incorrectly.
3. Once fitted to the bar, the engager handle can be turned. This lifts the contacts into the busway and has a positive lock once fully rotated.

Key features:

- SafeWork Technology
- Individual tap-off units rated up to 125A
- Interlock feature ensures polarities do not mismatch
- Tap-off units can be fitted with IEC 309 receptacles, NEMA receptacles or whip cords as required



Tap off units

METERING

iMPB offers advanced metering which allows the user to monitor, integrate and display data centre power information via RJ45 Ethernet plug-in connections.



Daisy Chaining Meters

Final circuit monitoring is integrated into the busway to measure the total load of the busbar and tap off units. Power calculations of total input power for each busway run can also be provided.

Options:

- Voltage for all three phases
- Current - phase, ground and neutral
- kW, KVa, kVAR, power factor, kWh

Advanced options:

- Voltage total harmonic distortion
- Overvoltage/ undervoltage alarm threshold
- Minimum and maximum current
- Demand and percentage load current
- Crest factor
- Warning and alarm threshold


It is also possible to monitor closed and trip status for each MCB. The status signals are fed back to the end feed using the integrated Ethernet cabling. The modules run in a daisy chain from meter to meter utilising the side channel in the housing for cabling.

TECHNICAL DATA

Technical Data						
Rated Current (A)	160	250	400	630	800	1000
Rated Operational Voltage (V)	600	600	600	600	600	600
Rated Insulation Voltage (V)	1000	1000	1000	1000	1000	1000
Short Circuit						
Short Circuit Current Rating (rms symmetrical 1 second) KA	25	25	30	35	35	35
Peak Value (kA)	52.5	52.5	65	77	77	77
Short Circuit Conditional Rating (KAIC)	50	50	50	50	50	65
Phase Conductor						
Cross Sectional Area (mm ²)	122	122	210	255	320	806
Neutral Conductor						
Cross Sectional Area (mm ²)	122	122	210	255	320	806
Isolated Ground Conductor						
100% Earth Cross Sectional Area (mm ²)	122	122	210	255	320	N/A
Housing Ground Path						
Cross Sectional Area (mm ²)	1412	1412	1412	2030	2030	2797
Overall Dimensions						
Height x Width of 4 Bar System (mm)	44 x 175	44 x 175	44 x 175	60 x 200	60 x 200	201.5x73.5
Weight						
Weight of 4 Bar System (kg/m)	9.45	9.45	14.2	19.4	23.2	17.71

INTELLIGENT MEDIUM POWERBAR

iMPB

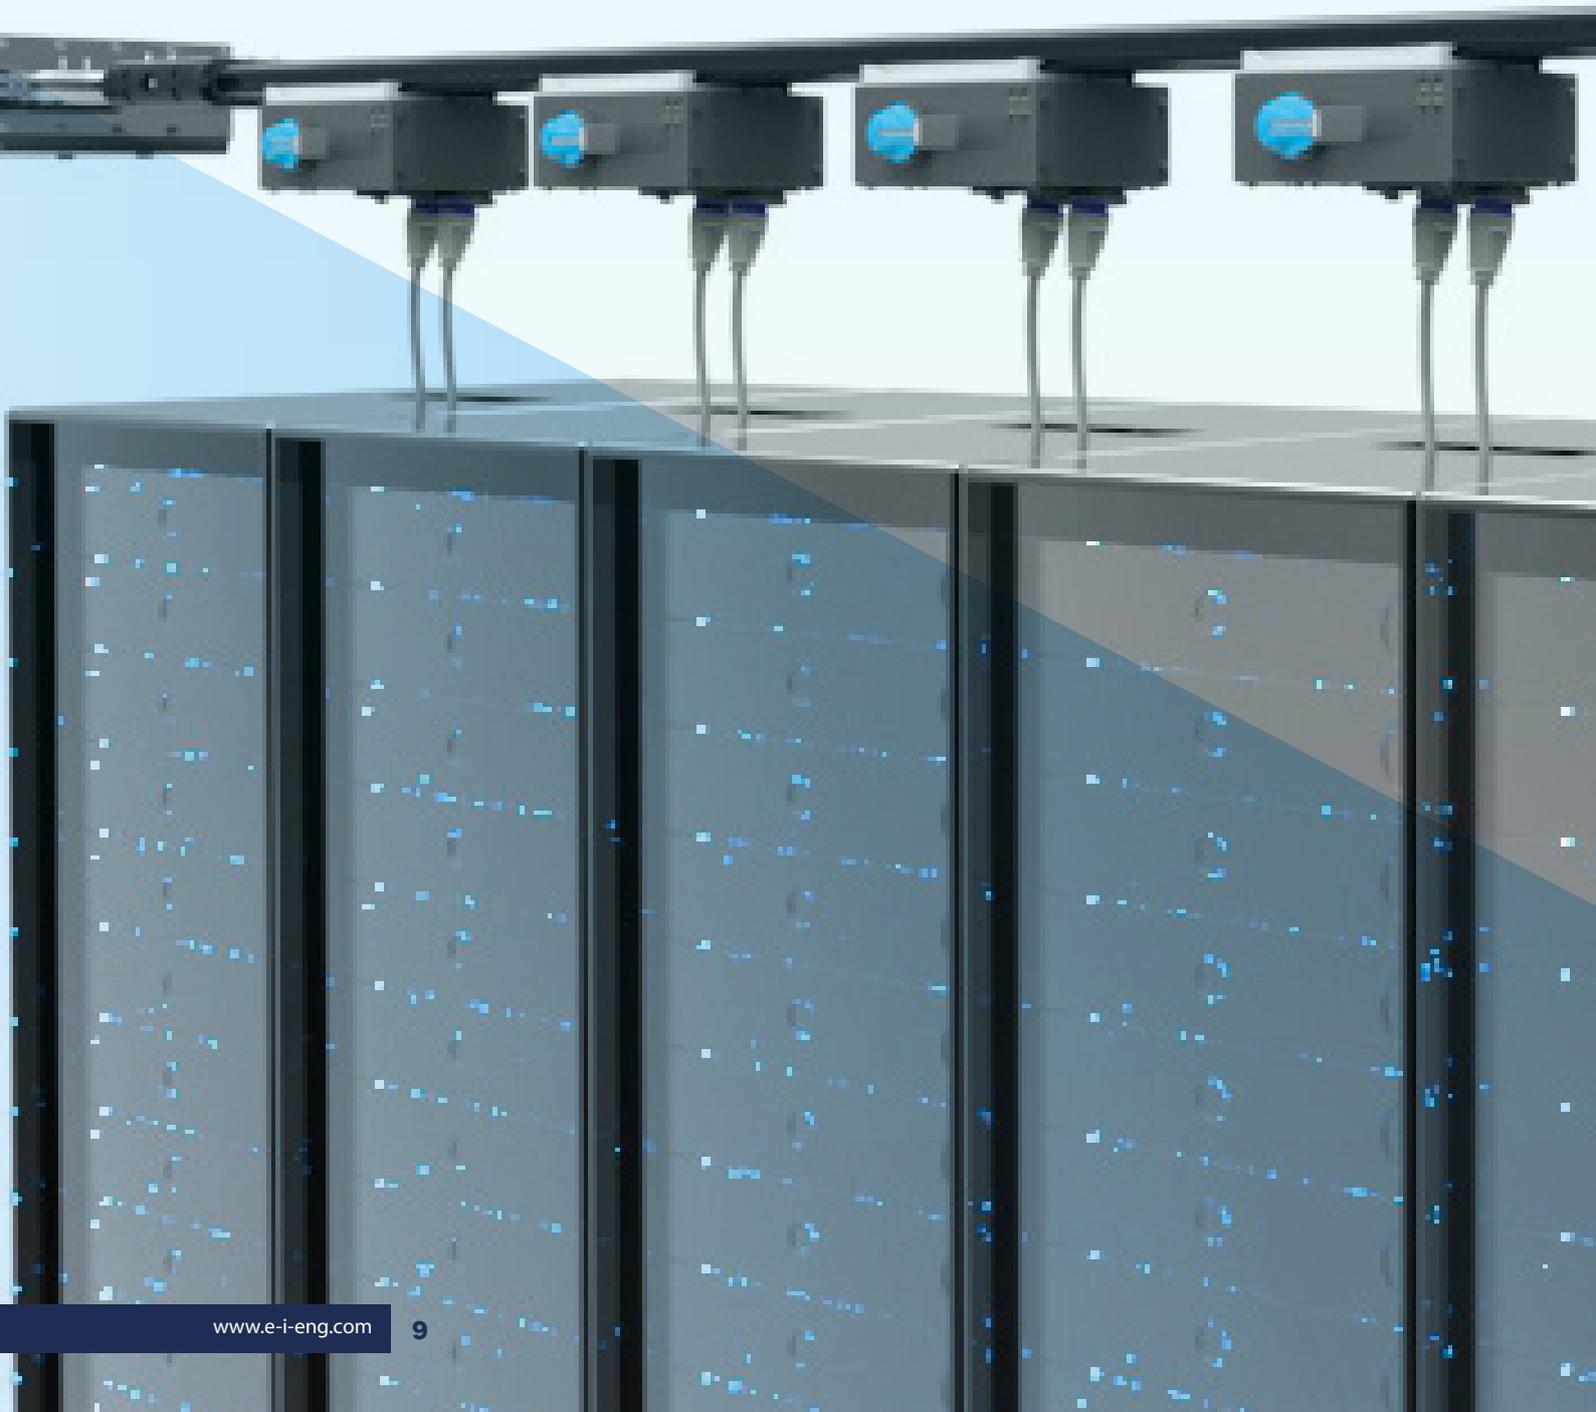





E+I ENGINEERING GROUP

E+I Engineering Ltd.
[European Manufacturing Location](#)

Ballyderowen
Burnfoot
Co. Donegal
Ireland

Tel:
(UK) +44 (0)28 71353030
(ROI) +353 (0)74 9368719

Powerbar Gulf LLC
[Middle East Manufacturing Location](#)

N16/N17
Al Ghail Industrial Park
Ras Al Khaimah
PO Box 13229
UAE

Tel: +971 (0) 7221 6100

E+I Engineering USA Corp
[USA Manufacturing Location](#)

400 Supreme Industrial Drive
Anderson
South Carolina
29621

Tel: +1 864 375 1757

E+I Engineering Ltd.
[UK Central Office](#)

2/8 Victoria Avenue
London
EC2M 4NS

Tel: +44 (0)20 3206 1650

Email:
info@e-i-eng.com

WWW.E-I-ENG.COM